



SIDING.X


STRIKING EDGES FOR A
LASTING IMPRESSION



Intelligent solutions
that convince right
across the board.




The new PREFA Siding.X façade product gives your building a distinctive look and distinguishes itself with its outstanding constructive and functional characteristics.

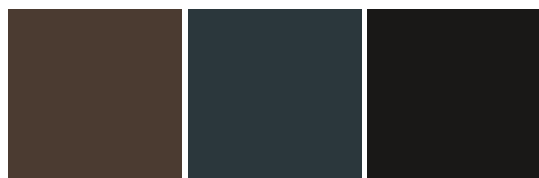


01 P.10 brown 02 P.10 anthracite 03 P.10 black




04 P.10 brick red 05 P.10 oxide red 06 P.10 moss green

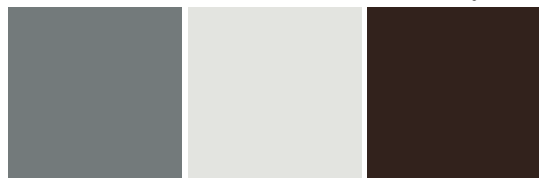


07 P.10 light grey 10 P.10 prefa white 11 P.10 nut brown

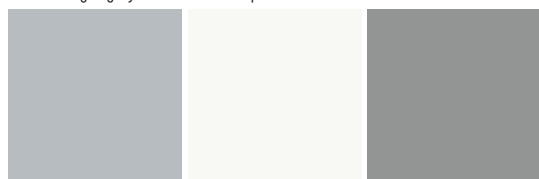


12 metallic silver 17 pure white 20 smoke silver

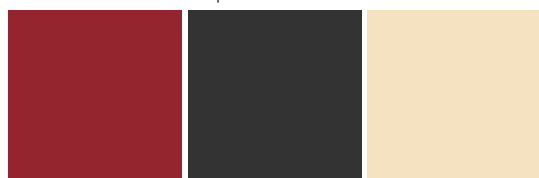

21 ruby red 23 black grey 25 ivory

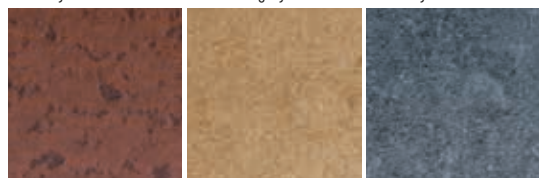

41 P.10 rust brown 42 P.10 sand brown 43 P.10 stone grey

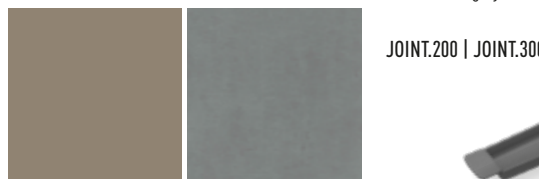

45 bronze 45 patina grey


JOINT.200 | JOINT.300 | JOINT.400



STORM-PROOF CLIP



STORM-PROOF CLIP
MOUNTING AID



PREFA SIDING.X — TECHNICAL DATA

Material colour-coated aluminium alloy

Fastening screwed to the aluminium or wood substructure

Coating high-quality two-layer stove-enamel finish

Standard formats 200 × 1.0 mm | 300 × 1.0 mm | 400 × 1.0 mm

Length 500–2,500 mm

Weight approx. 3.30 to 4.30 kg/m² depending on the visible width

PREFA SIDING.X

A façade siding with a distinctive character



! Made of aluminium alloy.

! Approx. 3.30–4.30 kg/m² depending on the visible width.

! Prepared according to parts list.

! Delivery time for siding.X and flashing strips (smooth): 12–15 working days.

! Existing colours are not suitable for re-coating at a later stage.

! Colours may be slightly different in subsequent deliveries, therefore we recommend ordering spare parts with the initial order.

! Tested according to EN 13501-1 and ÖNORM B 3800-5.

VERSIONS

! With or without shadow gap; shadow gap: 15 mm wide and 7 mm deep.

! With or without edge downstand (11 mm, ± 1 mm).

! Lengths between 500 and 2,500 mm.

! Special visible widths (120 to 400 mm) upon request, with surcharge.

! Level substructure (± 1.5 mm) measured on a length of 3 m.

MANY
INSTALLATION
OPTIONS
POSSIBLE

* The colour guarantee ensures that the painted surface is protected from chips and blistering under the terms specified in the guarantee certificate. You can find more information about the material and colour guarantee at www.prefa.com/Guarantee. Subject to technical modifications and printing errors. Printed colours may vary from the original material. 01/2018 | KB | SV