




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

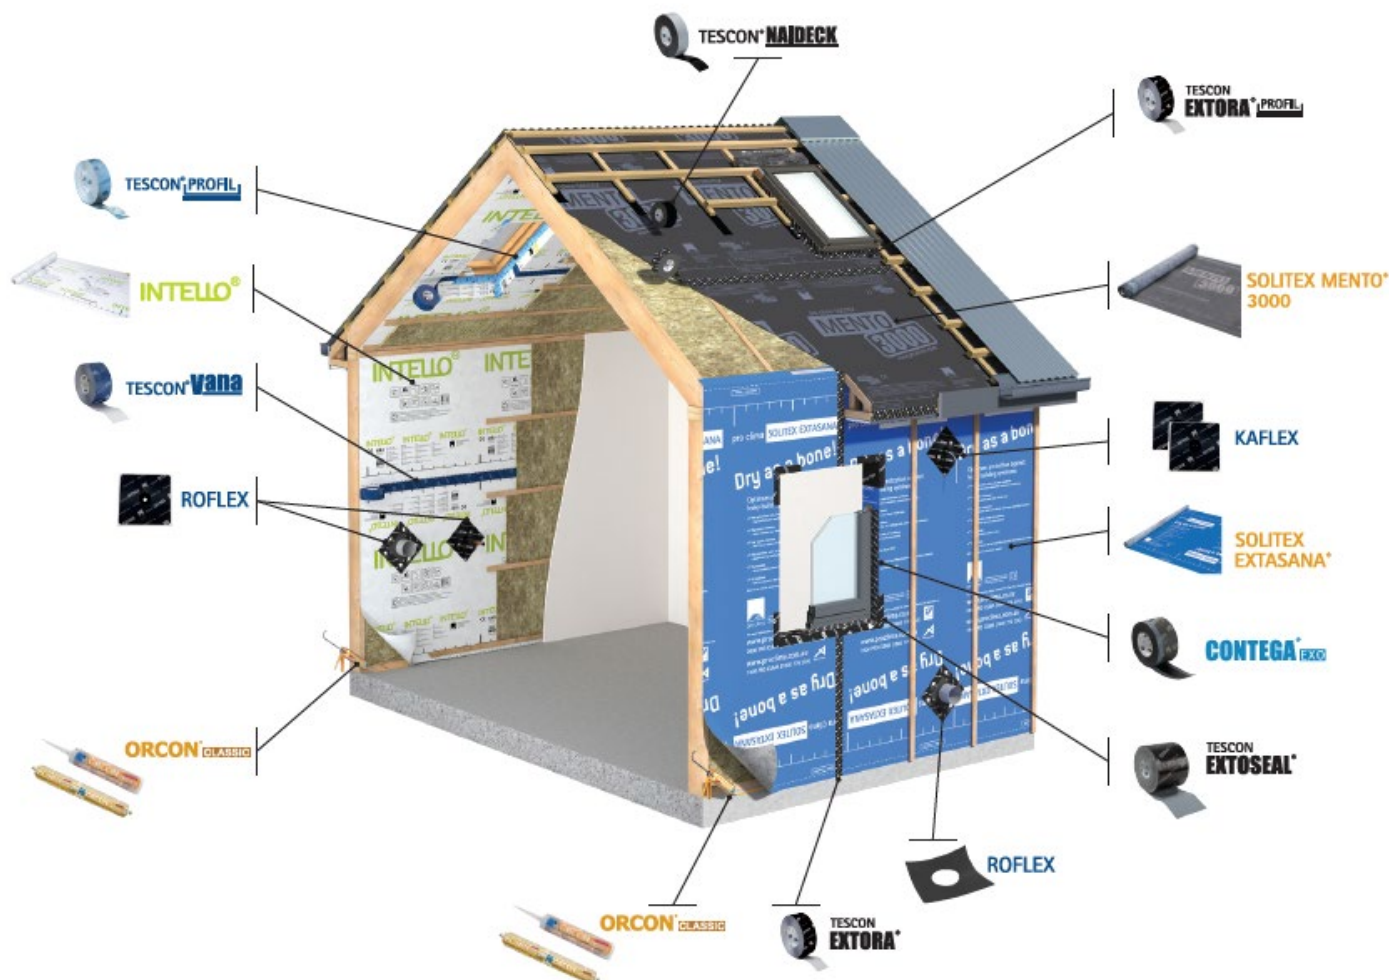

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima DASATOP FIX

Product description and its intended use (measurements, materials, usage):

DASATOP FIX board is used to secure the refurbishment vapour control layer DASATOP around existing rafters from the outside of the roof or wall structure.

Key Features:

- MDF/HDF fibreboard
- 1m lengths
- 40mm wide x 3mm thick
- fixed in place with staples or clouts

Product identifier (if applicable):

4026639154354

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: Aotearoa New Zealand Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME Level 1, 47 The Esplanade

SUBURB Petone

CITY, COUNTRY Lower Hutt, New Zealand

POSTCODE 5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

- B2 DURABILITY: Performance clauses B2.3.1 (a) not less than 50 years, B2.3.1 (b) 15 years and B2.3.2.
- F2 HAZARDOUS BUILDING MATERIALS: Performance clause F2.3.1.

Statement on how the building product is expected to contribute to compliance:

- B2.3.1 (a), (b) and B2.3.2: DASATOP FIX has a durability of at least 50 years when installed correctly. This product is only designed for up to one month of outdoor exposure, and should be protected during service. DASATOP FIX is expected to have a serviceable life equal to that of the internal lining.
- F2.3.1: DASATOP FIX meets this requirement and will not present a health hazard to people.

- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

Limitations on the use of the building product:

- Not to be permanently exposed to external conditions.
- Store in a cool dry space

Design requirements that would support the appropriate use of the building product:

For the installation of air and vapour control layers from the outside during roof refurbishment or renovations of existing structures.

Installation requirements *(also provide link to the product installation guide)*:

Refer to the DASATOP installation instructions available from www.proclima.co.nz.

Maintenance requirements *(also provide link to the product maintenance guide):*

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

Yes No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

1 | 1 | 1 | 2 | 2 | 3